

AC volt-amperometric clamp

FE03H



The FE03H unit is equipped with the necessary electronic circuitry for conditioning and the AD conversion of current and voltage signal. The RMS and active power values are obtained through digital processing of a dedicated DSP (Digital Signal Processor). The digital output data (16/32 bit) are made available externally via a galvanic isolated RS485 serial bus.

The number of FE03H devices connected together on the communication bus depends essentially on the power capacity of the master; if the master is a DL02 datalogger this number is limited to 16.

As each analog channel is individually calibrated with the calibration curve stored in EEPROM, every FE03H is fully interchangeable. The current probe uses a flexible coil suitable for measuring currents with up to 3000 Arms on bundles of wires or large diameter rods.


The communication bus is accessed via an high quality push-pull connector, each device also makes available an additional connector so to allow a daisy chain scheme with multiple devices. The instrument power supply is provided through the communication bus, there is no battery on board.



INT11 adapter enables DL01 dataloggers to interface one or more FE03/04 devices. DL02 dataloggers can be provided with the INT11 interface embedded onboard.

Among the accessories available for the voltage channel are offered probes with test clips, alligator clips and the exclusive OptiVeloX's magnetic hooking probes, able to establish electrical contact directly above the screws of the electrical terminal without requiring any preliminary operation. All accessories are designed to operate with maximum safety.



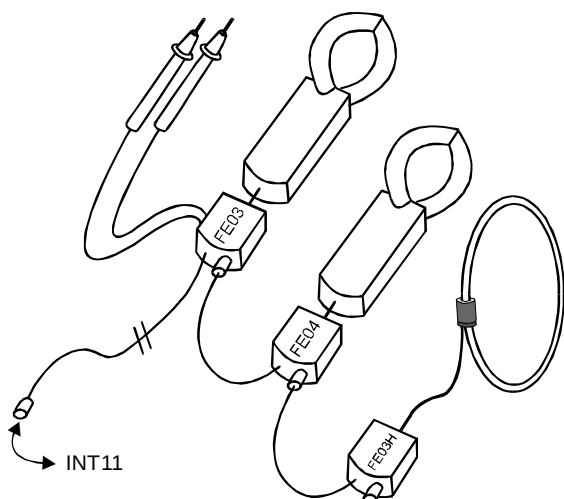

**Example of cascade connection
between 3 FE03/04 devices**

Ordering codes:

Code	Part	Description
8802754	FE03H	AC volt-amperometric clamp
8802740	INT11	Interface DL01-FE03/04
2400185	-	Adapter cable pair 2mm/4mm L=50 cm blue/black
2400187	-	Test clips pair CAT III 1000V blue/black
2400189	-	Alligator clips pair CAT IV 1000V blue/black
8802421	-	Magnetic hooking probes 4mm L=50cm blue/black

Technical specifications

VOLTAGE

Range: 0.0...600.0 Vrms (TRMS)

Resolution: 0.1 Vrms

Accuracy: $\pm(1\% \text{ rdg} + 2 \text{ dgt})$ @50Hz, $V > 50V$

Input impedance: 2 Mohm

CURRENT

Range: 0.0...3000.0 Arms (TRMS)

Resolution: 0.1 Arms

Accuracy⁽¹⁾: $\pm(1\% \text{ rdg} + 10 \text{ dgt})$ @50Hz $\pm 10\%$

ACTIVE POWER

Range: 0...1800000 W

Resolution: 1 W

Accuracy⁽¹⁾: $\pm(1.5\% \text{ rdg} + 10 \text{ dgt})$ @50Hz $\pm 10\%$, $V > 50V$,
 $I > 100A$

PEAK VOLTAGE⁽²⁾

Range: 0.0...850.0 V

Resolution: 0.1 V

Accuracy: $\pm(5\% \text{ rdg} + 2 \text{ dgt})$ @50Hz $\pm 10\%$

Input impedance: 2 Mohm

PEAK CURRENT⁽²⁾

Range: 0.0...4250.0 A

Resolution: 0.1 A

Accuracy: $\pm(5\% \text{ rdg} + 10 \text{ dgt})$ @50Hz $\pm 10\%$

POWER SUPPLY (Vs)

3.5...5.1 Vdc

15 mA typ

ENVIRONMENT

Reference temperature: $23^{\circ} \pm 2^{\circ}C$ ($45\% < RH < 75\%$)

Working temperature: $0^{\circ} \dots 40^{\circ}C$ ($RH < 85\%$)

Storage temperature: $-10^{\circ} \dots 60^{\circ}C$ ($RH < 95\%$)

Max height of use: $< 2.000 \text{ m}$

DIMENSIONS

190 mm (coil diameter)

1.5 m (coil cable length) 40 mm x 40 mm x 20 mm (front end)

1.5 m (front end cable length)

WEIGHT

~150 g (measurement coil)

~80 g (front end)

COMPLIANCE

Safety: EN 61010-1, EN 61010-2-031, EN 61010-2-032

Category of measure: CATIII 600V

Pollution degree: 2

Double insulation ☐

RS485 isolation voltage: 2500 Vrms

(1)

The specified accuracy refers to measurements made at the reference temperature with the conductor at the center of the coil. The measured value will increase by about 0.2% with the conductor approaching the opposite side of the coil junction.

(2)

Optional channel.